
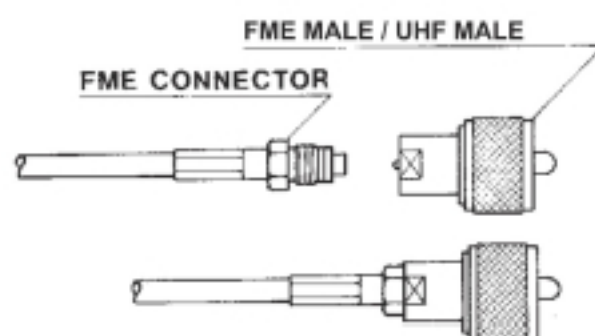


HP-AC/U

Angular Connector with 5m/16.4ft coaxial cable

TECHNICAL DATA

Frequency Range: DC-500MHz
Impedance: $50 \pm 2 \Omega$
Antenna Connector: UHF-Female, gold plated central pin
Connector insulator: PTFE
Cable Connector: FME-female + adapter FME-male to UHF-male
Cable Length / Type: 5m; 16.4ft / RG 58 C/U MIL C17
Cable Temperature: -40°C to +70°C
Cable Attenuation: 0,5dB @ 50MHz; 0,8dB @ 150MHz; 1,7dB @ 500MHz
Max Power: ... 500Watts @ 50MHz; 300Watts @ 150MHz; 150Watts @ 500MHz

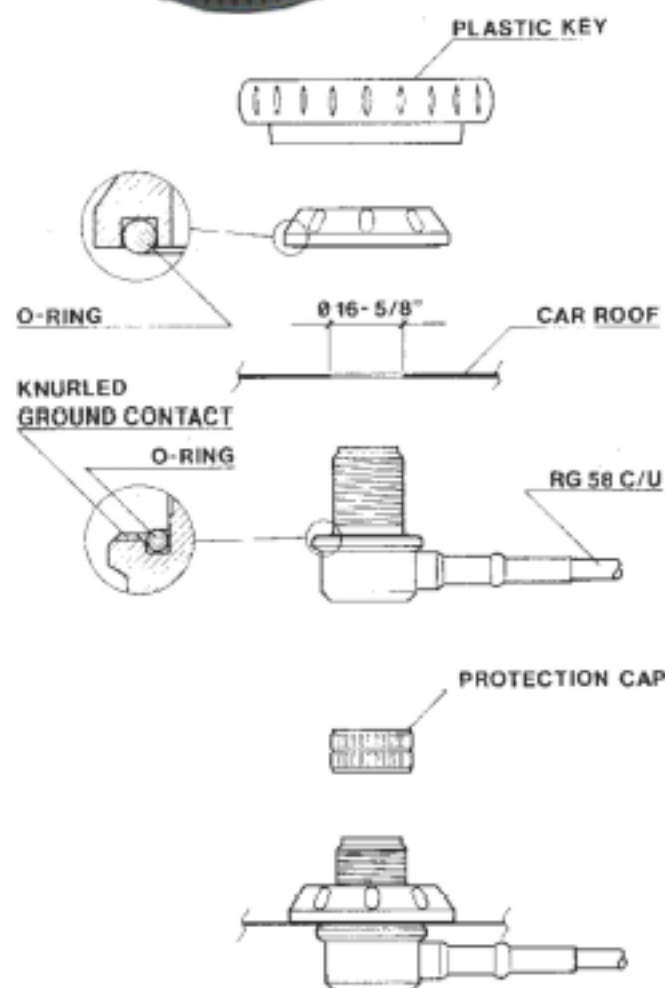

OPTIONAL ADAPTERS

